

Datasheet

[Get a Quote](#)

Overview

S5720-14X-PWH-SI-AC, Huawei S5700 Series Switches


Quick Specification

Model	S5720-14X-PWH-SI-AC
Part Number	02350MTV
Memory (RAM)	1 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	5.9 kg (13.01 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 315.0 mm (1.72 in. x 17.4 in. x 12.4 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 324.0 mm (1.72 in. x 17.4 in. x 12.76 in.)</p>

Datasheet

Product Details:

Appearance:

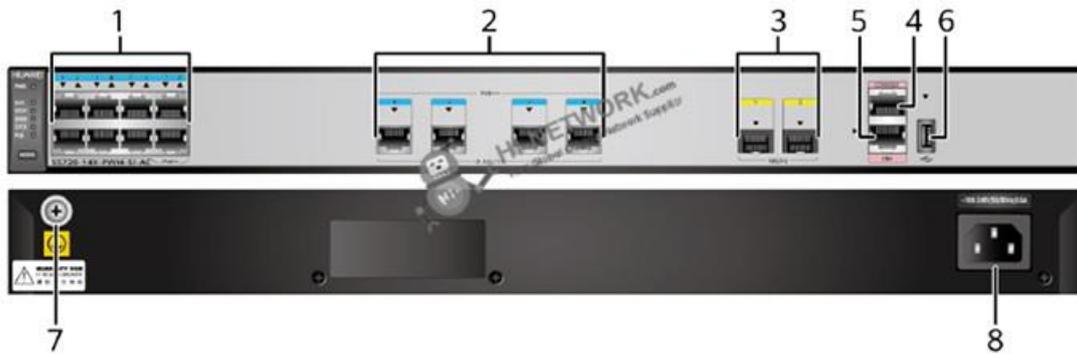

①	Eight PoE+ 10/100/1000BASE-T ports
②	Four PoE++ 100M/1000M/2.5GE BASE-T ports (MultiGE port)
③	Two 10GE SFP+ ports
④	One console port
⑤	One ETH management port
⑥	One USB port
⑦	Ground screw
⑧	AC socket

Get more information:

Do you have any question about the S5720-14X-PWH-SI-AC 02350MTV?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02350MTV
Model	S5720-14X-PWH-SI-AC
Memory (RAM)	1 GB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
Mean time between failures (MTBF)	86.55 years
Mean time to repair (MTTR)	2

Datasheet

Availability	> 0.99999
Service port surge protection	Common mode: ± 6 kV
Power supply surge protection	± 6 kV in differential mode, ± 6 kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 315.0 mm (1.72 in. x 17.4 in. x 12.4 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 324.0 mm (1.72 in. x 17.4 in. x 12.76 in.)
Weight (with packaging)	5.9 kg (13.01 lb)
Stack ports	First eight GE electrical ports 10GE SFP+ ports (V200R010C00 and later versions)
RTC	Supported
RPS	Not supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	Not providing the PoE function: 52 W 100% PoE loads: 422 W (system power consumption: 52 W, PoE: 370 W)
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption 	44.94 W
Short-term operating temperature	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 52.8 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223