

## Datasheet

[Get a Quote](#)

### Overview

S5720-52X-PWR-LI-ACF, Huawei S5700 Series Switches


### Quick Specification

Model	S5720-52X-PWR-LI-ACF
Part Number	98010621
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported
Weight with packaging [kg(lb)]	6.6 kg (14.55 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.8 mm (1.72 in. x 17.4 in. x 12.39 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.8 mm (1.72 in. x 17.4 in. x 12.75 in.)</p>

## Datasheet

### Product Details:

#### Appearance:

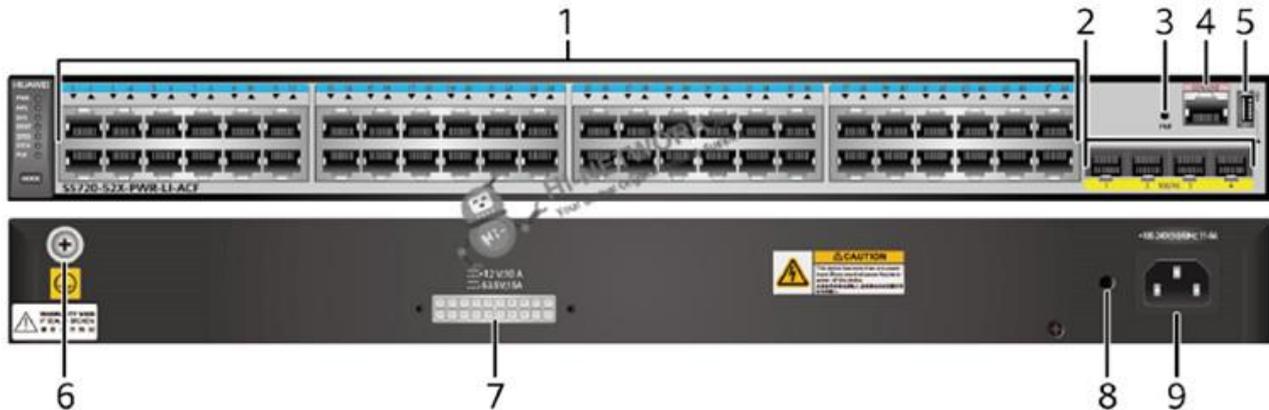

①	Forty-eight PoE+ 10/100/1000BASE-T ports
②	Four 10GE SFP+ ports
③	One PNP button
④	One console port
⑤	One USB port
⑥	Ground screw
⑦	RPS socket
⑧	Jack for AC power cable locking strap
⑨	AC socket

Get more information:

Do you have any question about the S5720-52X-PWR-LI-ACF 98010621?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	98010621
Model	S5720-52X-PWR-LI-ACF
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.

## Datasheet

Mean time between failures (MTBF)	45 years
Mean time to repair (MTTR)	2
Availability	> 0.99999
Service port surge protection	Common mode: $\pm 7$ kV
Power supply surge protection	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 314.8 mm (1.72 in. x 17.4 in. x 12.39 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 323.8 mm (1.72 in. x 17.4 in. x 12.75 in.)
Weight (with packaging)	6.6 kg (14.55 lb)
Stack ports	Forty-eight 10/100/1000BASE-T ports and four 10G SFP+ ports
RTC	Not supported
RPS	Supported
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput, full speed of fans)	Not providing the PoE function: 52.1 W 100% PoE loads: 977 W (system power consumption: 237.8 W, PoE: 739.2 W)
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> <li>• Tested according to ATIS standard</li> <li>• EEE enabled</li> <li>• No PoE power consumption</li> </ul>	42.9 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 53.9 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

---

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

---

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223