

[Get a Quote](#)

Overview


The ES1D2X08SX5L provides eight 1000M/10G BASE-X ports for data transmission and switching.

Quick Specification

Table 1 shows the quick specification.


| | |
|--|--|
| Model | ES1D2X08SX5L |
| Part Number | 03032WTE |
| Description | 8-port 10GE SFP+ Interface Card (X5L, SFP+) |
| Dimensions without packaging (H x W x D) [mm(in.)] | 35.1 mm x 397.2 mm x 430.4 mm (1.38 in. x 15.64 in. x 16.95 in.) |
| Weight without packaging [kg(lb)] | 2.7 |
| Typical power consumption [W] | 67 |
| Memory | 1 GB |
| Basic functions | Provides eight 1000M/10G BASE-X ports for data transmission and switching. |
| Distributed forwarding | Performs concurrent data forwarding using a distributed data plane. |
| Hot swapping | The ES1D2X08SX5L is hot swappable. |

Figure 1 shows the appearance of ES1D2X08SX5L.

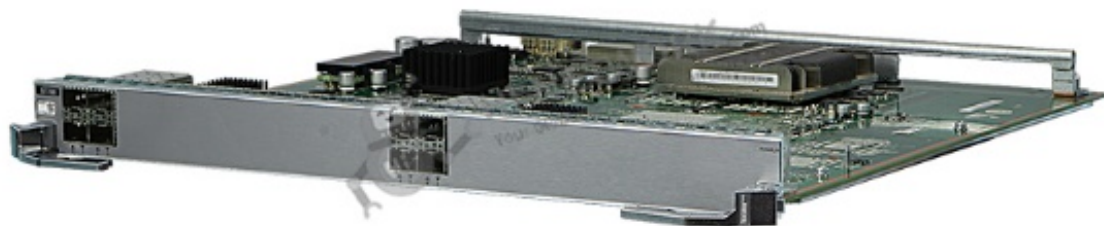

Product Details

Figure 2 show the indicators on the ES1D2X08SX5L panel.

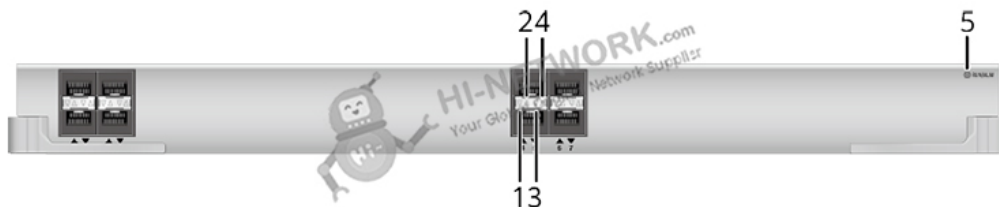

Note:

| Number | Indicator | Color | Description |
|--------|---|--------|--|
| (1) | ACT indicator of a lower optical port | Yellow | Blinking: The port is transmitting and receiving data. |
| (2) | ACT indicator of an upper optical port | | |
| (3) | LINK indicator of a lower optical port | Green | Steady on: A link has been established on the port. |
| (4) | LINK indicator of an upper optical port | | |
| (5) | RUN/ALM: running status indicator | Green | Steady on: The card is powered on. If the indicator is steady green for no more than 30 seconds, the CPU is being started. If the indicator is steady green for more than 30 seconds, the software is not running. Slow blinking: The card software is running properly. Fast blinking: The card software is starting. |
| | | Red | Steady on: The card has failed and the fault requires manual intervention. |
| | | Yellow | Steady on: The card is powered off. (For example, the card has been forcibly powered off using the power off command or is about to start.) |

Figure 3 show the ports on the ES1D2X08SX5L panel.



Note:

| | |
|-----|-------------------------------------|
| (1) | Eight 10GBASE SFP+/1000BASE-X ports |
|-----|-------------------------------------|

Get more information

Do you have any question about the ES1D2X08SX5L (03032WTE)?

Contact us now via info@hi-network.com.

Specification

| ES1D2X08SX5L Specification | |
|--|--|
| Basic Information | |
| Model | ES1D2X08SX5L |
| Part Number | 03032WTE |
| Description | 8-port 10GE SFP+ Interface Card (X5L, SFP+) |
| Level-1 category | Interface card |
| Technical Specifications | |
| Dimensions without packaging (H x W x D) [mm(in.)] | 35.1 mm x 397.2 mm x 430.4 mm (1.38 in. x 15.64 in. x 16.95 in.) |
| Weight without packaging [kg(lb)] | 2.7 |
| Typical power consumption [W] | 67 |
| Typical heat dissipation [BTU/hour] | 228.61 |
| Maximum power consumption [W] | 78 |
| Maximum heat dissipation [BTU/hour] | 266.14 |
| Memory | 1 GB |

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

